

Cannulated Screw Set

Screws

| | |
|----------------------------|-----|
| Cannulated Screw Set | 4/1 |
| Headless Compression Screw | 4/3 |

Instruments

| | |
|---|-----|
| Herbert Screw Instrument Set | 4/4 |
| 4.0mm Cannulated Screw Instrument Set | 4/5 |
| 7.3mm Cannulated Screw Instrument Set | 4/6 |
| Headless Compression Screw Instrument Set | 4/8 |

Screws

Herbert Screw

*Diameter: 3.0mm
Head Diameter: 4.0mm
Hexagonal Socket: 2.0mm
Material: Titanium Alloy*



| REF | Length (mm) |
|-----------|-------------|
| 060010014 | 14 |
| 060010016 | 16 |
| 060010018 | 18 |
| 060010020 | 20 |
| 060010022 | 22 |
| 060010024 | 24 |
| 060010026 | 26 |
| 060010028 | 28 |
| 060010030 | 30 |
| 060010032 | 32 |

4.0mm Cannulated Screw

*Diameter: 4.0mm
Head Diameter: 6.0mm
Hexagonal Socket: 2.5mm
Material: Titanium Alloy*



| REF | Length (mm) |
|-----------|-------------|
| 060020026 | 26 |
| 060020028 | 28 |
| 060020030 | 30 |
| 060020035 | 35 |
| 060020040 | 40 |
| 060020045 | 45 |
| 060020050 | 50 |
| 060020055 | 55 |
| 060020060 | 60 |

Washer for 4.0mm Cannulated Screw

*Thickness: 1.0mm
Width: 7.0mm
Material: Titanium Alloy*



| REF |
|-----------|
| 060030000 |

Spiked Washer for 4.0mm Cannulated Screw

*Thickness: 3.5mm
Width: 8.0mm
Material: Titanium Alloy*



| REF |
|-----------|
| 060040000 |

6.5mm Cannulated Screw, Half Threaded

*Diameter: 6.5mm
Head Diameter: 8.0mm
Hexagonal Socket: 4.0mm
Material: Titanium Alloy*



| REF | Length (mm) |
|-----------|-------------|
| 060050045 | 45 |
| 060050050 | 50 |
| 060050055 | 55 |
| 060050060 | 60 |
| 060050065 | 65 |
| 060050070 | 70 |
| 060050075 | 75 |
| 060050080 | 80 |
| 060050085 | 85 |
| 060050090 | 90 |
| 060050095 | 95 |
| 060050100 | 100 |
| 060050105 | 105 |
| 060050110 | 110 |

6.5mm Cannulated Screw, Fully Threaded

Diameter: 6.5mm
 Head Diameter: 8.0mm
 Hexagonal Socket: 4.0mm
 Material: Titanium Alloy



| REF | Length (mm) |
|-----------|-------------|
| 060060040 | 40 |
| 060060045 | 45 |
| 060060050 | 50 |
| 060060055 | 55 |
| 060060060 | 60 |
| 060060065 | 65 |
| 060060070 | 70 |
| 060060075 | 75 |
| 060060080 | 80 |
| 060060085 | 85 |
| 060060090 | 90 |
| 060060095 | 95 |
| 060060100 | 100 |
| 060060105 | 105 |
| 060060110 | 110 |

7.3mm Cannulated Screw, Short Threaded

Diameter: 7.3mm
 Head Diameter: 8.0mm
 Hexagonal Socket: 4.0mm
 Material: Titanium Alloy



| REF | Length (mm) |
|-----------|-------------|
| 060080050 | 50 |
| 060080055 | 55 |
| 060080060 | 60 |
| 060080065 | 65 |
| 060080070 | 70 |
| 060080075 | 75 |
| 060080080 | 80 |
| 060080085 | 85 |
| 060080090 | 90 |
| 060080095 | 95 |
| 060080100 | 100 |
| 060080105 | 105 |
| 060080110 | 110 |

7.3mm Cannulated Screw, Long Threaded

Diameter: 7.3mm
 Head Diameter: 8.0mm
 Hexagonal Socket: 4.0mm
 Material: Titanium Alloy



| REF | Length (mm) |
|-----------|-------------|
| 060070050 | 50 |
| 060070055 | 55 |
| 060070060 | 60 |
| 060070065 | 65 |
| 060070070 | 70 |
| 060070075 | 75 |
| 060070080 | 80 |
| 060070085 | 85 |
| 060070090 | 90 |
| 060070095 | 95 |
| 060070100 | 100 |
| 060070105 | 105 |
| 060070110 | 110 |

Washer for 6.5mm/7.3mm Cannulated Screw

Thickness: 1.5mm
 Width: 13.0mm
 Material: Titanium Alloy



| REF |
|-----------|
| 060090000 |

Spiked Washer for 6.5mm/7.3mm Cannulated Screw

Thickness: 5.5mm
 Width: 13.0mm
 Material: Titanium Alloy



| REF |
|-----------|
| 060100000 |


Headless Compression Screw

Diameter: 3.0mm/3.5mm/4.0mm/5.0mm

Material: Titanium Alloy

Cannulated

4



| REF | Diameter (mm) | Length (mm) |
|-----------|---------------|-------------|
| 060140016 | 3.0 | 16 |
| 060140018 | 3.0 | 18 |
| 060140020 | 3.0 | 20 |
| 060140022 | 3.0 | 22 |
| 060140024 | 3.0 | 24 |
| 060140026 | 3.0 | 26 |
| 060140028 | 3.0 | 28 |
| 060140030 | 3.0 | 30 |
| 060150016 | 3.5 | 16 |
| 060150018 | 3.5 | 18 |
| 060150020 | 3.5 | 20 |
| 060150022 | 3.5 | 22 |
| 060150024 | 3.5 | 24 |
| 060150026 | 3.5 | 26 |
| 060150028 | 3.5 | 28 |
| 060150030 | 3.5 | 30 |
| 060160016 | 4.0 | 16 |
| 060160018 | 4.0 | 18 |
| 060160020 | 4.0 | 20 |
| 060160022 | 4.0 | 22 |
| 060160024 | 4.0 | 24 |
| 060160026 | 4.0 | 26 |
| 060160028 | 4.0 | 28 |
| 060160030 | 4.0 | 30 |
| 060160032 | 4.0 | 32 |
| 060160034 | 4.0 | 34 |
| 060170020 | 5.0 | 20 |
| 060170022 | 5.0 | 22 |
| 060170024 | 5.0 | 24 |
| 060170026 | 5.0 | 26 |
| 060170028 | 5.0 | 28 |
| 060170030 | 5.0 | 30 |
| 060170032 | 5.0 | 32 |
| 060170034 | 5.0 | 34 |
| 060170036 | 5.0 | 36 |
| 060170038 | 5.0 | 38 |
| 060170040 | 5.0 | 40 |
| 060170045 | 5.0 | 45 |
| 060170050 | 5.0 | 50 |

Instruments 110740000

110190100 Guide Wire $\phi 1.0$,
length 150mm



110011200 Screw Forceps, self-holding



110210200 Drill Bit $\phi 2.0/ \phi 2.4$,
length 150mm, cannulated



110211000 Screwdriver, hexagonal,
cannulated, $\phi 2.0$



110210300 Countersink, $\phi 3.0$,
length 150mm, for $\phi 3.0$
Cannulated Screws



110211100 Screwdriver, hexagonal, $\phi 2.0$



110190200 Guide Sleeve $\phi 1.2/\phi 3.0$,
for Guide Wire



110191000 Cleaning Brush $\phi 1.0$,
length 150mm



110210500 Drill Sleeve, $\phi 3.0$



110740001 Instrument Case



110190600 Fixation Sleeve $\phi 3.0$,
for Drill Bits



110191200 Wrench for Fixation Sleeve



110190400 Direct Measuring Device,
for $\phi 3.0$ Cannulated Screws



Instruments 110720000

110190100 Guide Wire ϕ 1.0,
length 150mm



110190200 Guide Sleeve ϕ 1.2/ ϕ 3.0,
for Guide Wire



110190300 Drill Sleeve, ϕ 3.0



110190400 Direct Measuring Device,
for ϕ 4.0 cannulated screws



110190500 Drill Bit, ϕ 2.8, length 150mm,
cannulated



110190600 Fixation Sleeve ϕ 3.0,
for Drill Bits



110011200 Screw Forcep, self-holding



110190800 Screwdriver, hexagonal,
cannulated, ϕ 2.5



110011400 Holding Sleeve



110191000 Cleaning Brush ϕ 1.0,
length 150mm



110040900 Screwdriver, hexagonal, ϕ 2.5



110191200 Wrench for Fixation Sleeve



110720001 Instrument Case



Instruments 110730000

110200100 Drill Sleeve, for Guide Wire



110200800 Wrench, for Parallel Wire Guide



110200200 Drill Sleeve



110200900 Multiple Wire Guide, for $\phi 2.5$ Guide Wire



110200300 Spreader



110201000 Tap for Cannulated Screws $\phi 7.3$, cannulated



110200400 Cleaning Brush



110201100 Screwdriver, hexagonal, cannulated, $\phi 4.0$



110200500 Holding Sleeve



110201200 Screwdriver, hexagonal, $\phi 4.0$



110200600 Parallel Wire Guide, for $\phi 2.5$ Guide Wire, adjustable



110061800 Holding Sleeve



110200700 Drill Bit, $\phi 5.0$, length 150mm, cannulated



110071700 Guide Wire, $\phi 2.5$, length 250mm



7.3mm Cannulated Screw Instrument Set

110170500 Guide Wire \varnothing 2.5,
length 250 mm,
with threaded tip



110170600 Direct Measuring Device,
for \varnothing 7.3 Cannulated Screws



110201700 Fixation Sleeve \varnothing 5.0,
for Cannulated Drill Bits



110201800 Wrench for Fixation Sleeve



110730001 Instrument Case



Instruments 111440000

111310100 Guide Wire, $\phi 1.0$,
length 120mm




111310900 Cleaning Brush, $\phi 1.0$,
length 155mm



111310200 Drill Sleeve, $\phi 2.0$




111311000 Aluminum Case, $\phi 3.0$

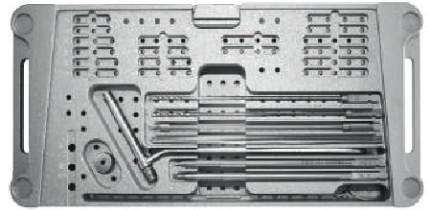

111310300 Drill Sleeve $\phi 2.0/\phi 1.0$,
for Guide Wire



111311100 Case Cover, $\phi 3.0$

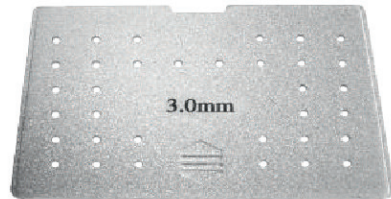

111310400 Fixation Sleeve $\phi 2.0$,
for Drill Bits



111310500 Drill Bit $\phi 2.0/\phi 1.0$, cannulated,
length 120mm



111310600 Drill Bit for predrilling,
cannulated, $\phi 2.8$,
length 120mm



111310100 Guide Wire, $\phi 1.0$,
length 120mm



111310700 Screwdriver Shaft, hexagonal,
cannulated, SW2.0



111311200 Drill Sleeve, $\phi 2.5$




111310800 Screwdriver Shaft, hexagonal,
SW2.0



111311300 Drill Sleeve $\phi 2.5/\phi 1.0$,
for Guide Wire




111311400 Fixation Sleeve ϕ 2.5, for Drill Bits




111311500 Drill Bit ϕ 2.5/ ϕ 1.0, cannulated, length 120mm




111311600 Drill Bit for predrilling, cannulated, ϕ 3.6, length 120mm




111310700 Screwdriver Shaft, hexagonal, cannulated, SW2.0




111310800 Screwdriver Shaft, hexagonal, SW2.0




111310900 Cleaning Brush, ϕ 1.0, length 155mm




111311700 Aluminum Case, ϕ 3.5

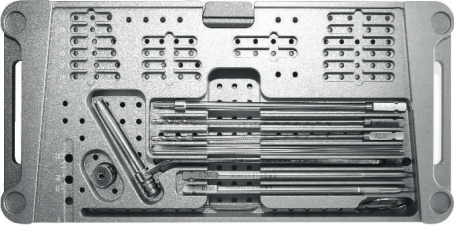

111311800 Case Cover, ϕ 3.5

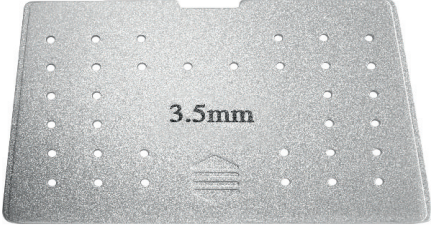

111311900 Guide Wire, ϕ 1.2, length 120mm




111312000 Drill Sleeve, ϕ 2.8



111312100 Drill Sleeve ϕ 2.8/ ϕ 1.2, for Guide Wire




111312200 Fixation Sleeve ϕ 2.8, for Drill Bits



111312300 Drill Bit ϕ 2.8/ ϕ 1.2, cannulated, length 120mm



111312400 Drill Bit for predrilling, cannulated, ϕ 4.2, length 120mm



111312500 Screwdriver Shaft, hexagonal, cannulated, SW2.5




111312600 Screwdriver Shaft, hexagonal, SW2.5




111312700 Cleaning Brush, $\phi 1.2$, length 155mm



111312800 Aluminum Case, $\phi 4.0$

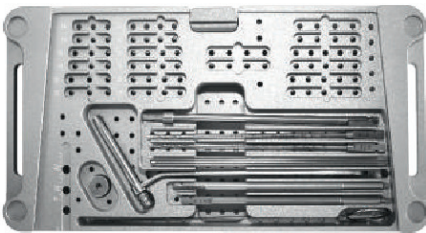

111312900 Case Cover, $\phi 4.0$

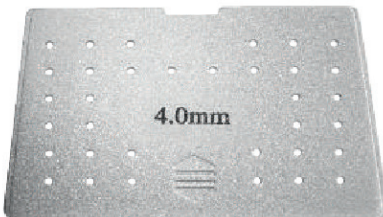

111313000 Guide Wire, $\phi 1.5$, length 120mm



111313100 Drill Sleeve, $\phi 3.5$



111313200 Drill Sleeve $\phi 3.5/\phi 1.5$, for Guide Wire



111313300 Fixation Sleeve $\phi 3.5$, for Drill Bits



111313400 Drill Bit $\phi 3.5/\phi 1.5$, cannulated, length 120mm



111313500 Drill Bit for predrilling, $\phi 4.5$ cannulated, length 120mm



111313600 Screwdriver Shaft, hexagonal, cannulated, SW3.0




111313700 Screwdriver Shaft, hexagonal, SW3.0




111313800 Cleaning Brush, $\phi 1.0$, length 155mm




111313900 Aluminum Case, $\phi 5.0$

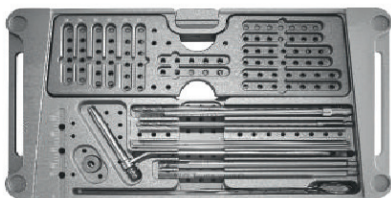


111314000 Case Cover, $\phi 5.0$



111314100 Tray I for Screws, $\phi 5.0$



111314200 Tray II for Screws, $\phi 5.0$

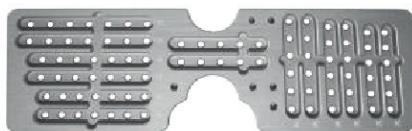

111182200 Reduction Forceps with Points



111314400 Depth Gauge, $\phi 1.5 \times 120$



110191200 Wrench for Fixation Sleeve, SW2.5



111314600 Screw Forceps



110224000 T-Handle with Quick Coupling



111314800 Handle with Quick Coupling, straight



111440100 Headless Compression Screw Instrument Case

